




NEWLONG®

NEWLONG AUTOMATIC BAG CLOSING MACHINE

MODEL A1-PB(DS-9C)

SIMPLE, COST EFFICIENT PEDESTAL

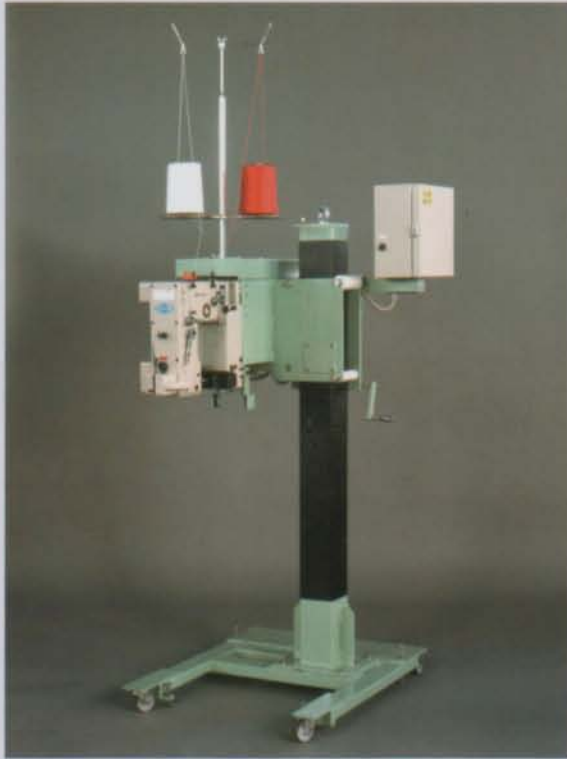

Model A1-PB (DS-9C)



Model DS-9C

NEWLONG offers the latest in bag closing technology with the A1-PB height adjustable pillar and DS-9C high speed, oil enclosed sewing head. Available for both plain sewn and crepe-tape bound closure. This closing system can be used with a range of NEWLONG conveyors or an existing conveyor.

SPECIFICATIONS

Sewing Head Height	720 -1,220 mm from floor to needle
Brake Moter	4P , 3 Phase, 0.75KW or 0.4KW depends on conveyor speed
Start/Stop	Photo-switch
Sewing Hard	Model DS-9C
Max. Speed	2,700 r.p.m.
Stitch Width	7- 10.5 mm (standard setting 10 mm)
Stitch Type	Single Needle, Double Thread Chain Stitch (single thread available by special order)
Cutter Type	Air Cylinder Driven Guillotine Cutter
Air Pressure	4 kg/cm ²
Air Consumption	3.5 Nl/min.
Lubrication System	Automatic Oil Bath System (Recommended Oil : Shell Tellus Oil #32)
Oil Feeding Volume	1,740 cc (approx.)
Machine Pulley Dia.	100 mm, Variable speed pulley available by special order
Needle Type	DR-H30 #26
Thread	Synthetic or Cotton, 20/6, 20/9

*Crepe-tape stand and binder are not included as a standard supply of plain sewn closure. Please specify plain sewn closure or crepe-tape bound closure when ordering.

PACKING INFRMATION

Model	A1-PB(DS-9C)	A1-PB(DS-9C) + CM4900-3	A1-PB(DS-9C) + CM4900-1	A1-PB(DS-9C) + CP4900
Net Weight (approx.)	250kg	320kg	280kg	300kg
Gross Weight (approx.)	350kg	450kg	380kg	430kg
Measurement (approx.)	2.4M ³	3.2M ³	2.5M ³	2.8M ³

*Specifications subject to change without prior notice.

NEWLONG MACHINE WORKS, LTD.