



FILLED BAG CLOSING MACHINE

MODEL B-2 (DS-2II) (DS-C)

**SIMPLIFIED OPERATION AND
LABOR-SAVING IN BAG CLOSING WORK**

Most popular as the standard type small-sized bag closer!




MODEL B-2(DS-2II)

FEATURES

1. The sewing head can be moved up and down simply by operating a handle.
2. Provision of casters allow the machine to be moved easily even by a female worker from place to place.
3. The carrier table is equipped with an anti-derailing device and automatic return device.
4. The machine can be operated easily by anybody.
5. Bags made of any type of material can be stitched.

SPECIFICATIONS

Capacity	200 to 300 bags/hour	
Dimensions	1,180mm long × 830mm wide × 2,200 mm high (Including thread stand)	
Power required	200W, Clutch motor, 4P (Single phase or three phase motor)	
Size of carrier table	455mm long × 328mm wide	
Sewing height	290mm to 750mm (Table surface to needle center)	
Net weight	149kg	
Sewing head	Stitch width	7mm to 12mm
	Thread	20×6, 20×9, 30×12; cotton or synthetic
	Needle	DR×2 #25 or #26
	Thread cutter	Automatic cutter
	Application	Bags made of paper, jute, PP/PE woven cloth, cotton and others.

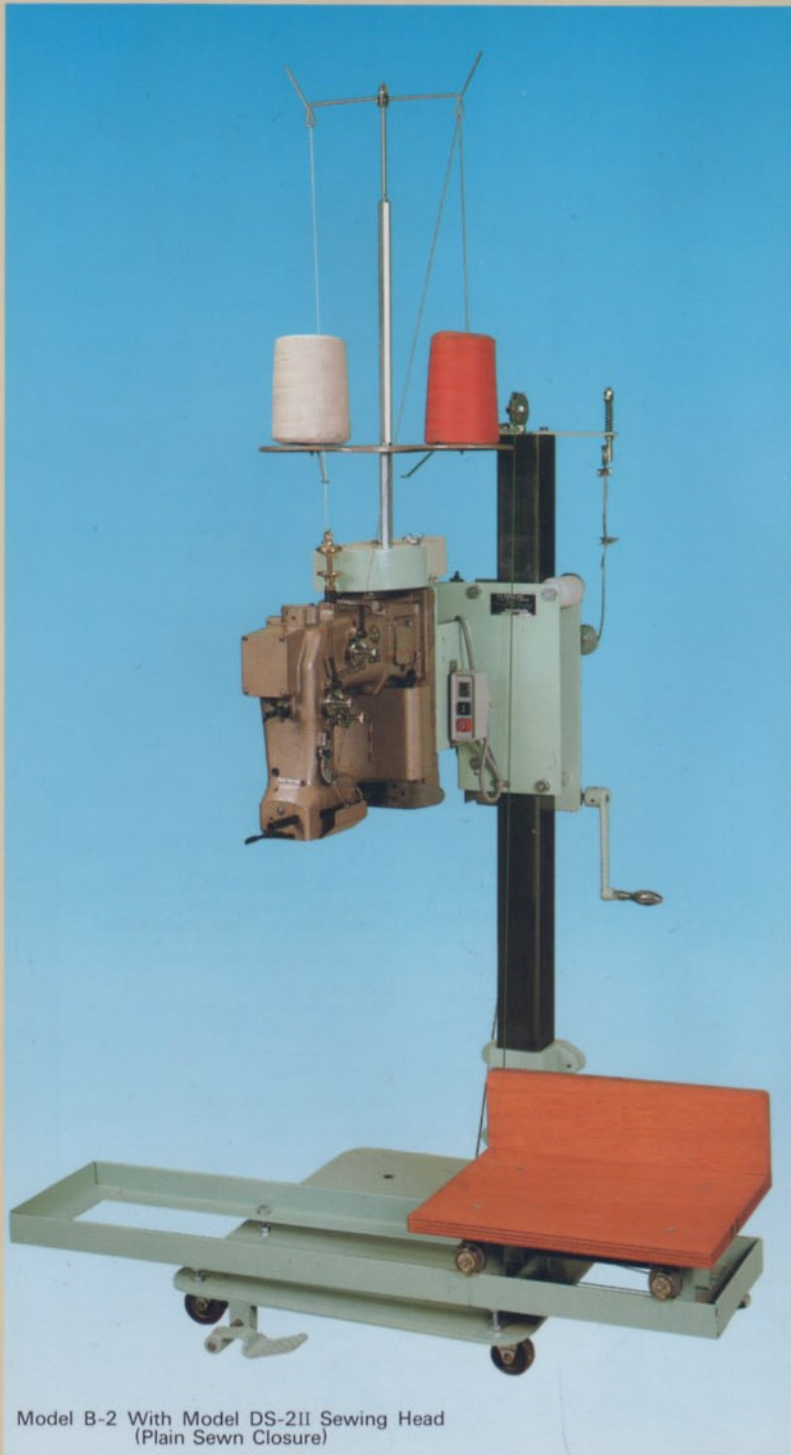

Model B-2 With Model DS-2II Sewing Head (Plain Sewn Closure)

Australian Distributors:

KAMEO TEXTILE ENGINEERING PTY. LTD.

DELIVERY ADDRESS: 310 HODDLE STREET
COLLINGWOOD VICTORIA 3066 AUSTRALIA

MAILING ADDRESS: PO BOX 2777
FITZROY MDC VICTORIA 3065

PHONE: (03) 9417 1949 FAX: (03) 9417 3739



Model B-2 can be installed in any place where electric power is available.

This small-sized bag closer can be used very conveniently in a small working area or when the machine must be moved from place to place for operation. All you do is just place bags on the carrier table, insert the bag top to near the needle, and step on the pedal to actuate the machine, and the bag is sewn

from the left end. As the bag is sewn, the table moves lightly on the inclined rail, so you just support it and need not push it. The inclination of the rail can be adjusted according to the weight of the bag and the thread is automatically cut.



Model B-2 With Model DS-C Sewing Head
(Tape Bound Closure)

The crepe-tape is bounded fully automatically!



MODEL B-2(DS-C)

■ FEATURES

1. The sewing head can be easily moved up and down according to the bag height.
2. The crepe tape unit can be installed for automatic setting of tape and provides beautiful finish.
3. The low position of the carrier table allows easy loading and unloading of bags.
4. With completion of sewing, the carrier table automatically returns to the original position.
5. Provision of casters allows easy movement of the machine.

■ SPECIFICATIONS

Capacity	200 to 300 bags/hour	
Dimensions	1,180mm long × 830mm wide × 2,200mm high (including thread stand.)	
Power required	200W, Clutch motor, 4P (single phase or three phase motor)	
Size of carrier table	455mm long × 328mm wide	
Sewing height	290mm to 750mm (table surface to needle center)	
Net weight	152kg	
Sewing head	Stitch width	7mm to 12mm
	Thread	20 × 6, 20 × 9, 30 × 12
	Thread cutter	Automatic cutter
	Crepe-tape	Automatic tape cutter
	Application	Exclusively for paper bags

*Specifications subject to change without notice.

Australian Distributors:

KAMEO TEXTILE ENGINEERING PTY. LTD.

DELIVERY ADDRESS: 310 HODDLE STREET
COLLINGWOOD VICTORIA 3066 AUSTRALIA

MAILING ADDRESS: PO BOX 2777
FITZROY MDC VICTORIA 3065

PHONE: (03) 9417 1949 FAX: (03) 9417 3739



Australian Distributors:

KAMEO TEXTILE ENGINEERING PTY. LTD.

DELIVERY ADDRESS: 310 HODDLE STREET
COLLINGWOOD VICTORIA 3066 AUSTRALIA

MAILING ADDRESS: PO BOX 2777
FITZROY MDC VICTORIA 3065

PHONE: (03) 9417 1949 FAX: (03) 9417 3739

